




Ness Electronics, Inc.  
 1800 E 121<sup>st</sup> Street  
 Burnsville, MN 55337  
[www.nesselectronics.com](http://www.nesselectronics.com)  
 1-800-331-7617



## 5mm x 20mm Slow Blow Pigtail Ceramic Fuses

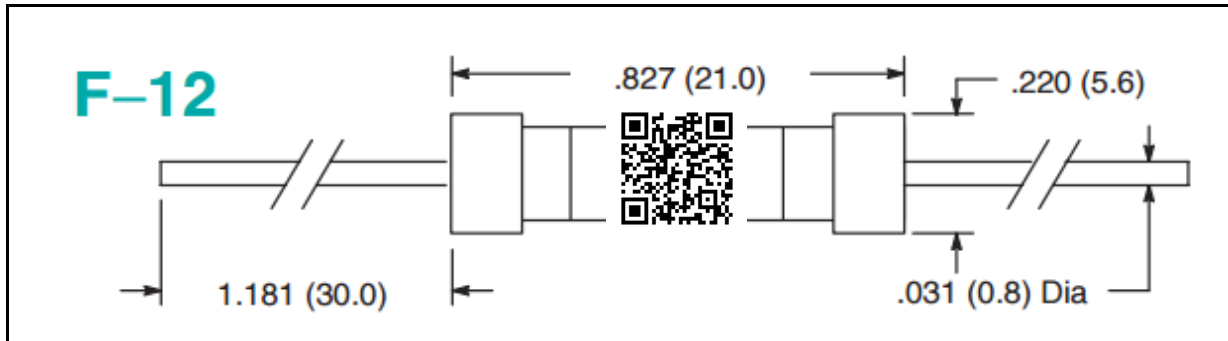

### Specifications:

Rated Voltage 250V  
 RoHS Compliant  
 Time Current Characteristics:

% of Ampere Rating		Opening Time			
		100mA to 800mA	1A to 3.15A	4A to 10A	> 10A
210%	Max	30 minutes	30 minutes	30 minutes	30 minutes
	Min	250ms	750ms	750ms	1 second
275%	Max	80 seconds	80 seconds	80 seconds	80 seconds
	Min	50ms	95ms	150ms	150ms
400%	Max	5 seconds	5 seconds	5 seconds	5 seconds
	Min	5ms	10ms	10ms	20ms
1000%	Max	150ms	150ms	150ms	150ms
	Min				


Part #	Current
NTE74-5SCL315MA	315mA
NTE74-5SCL400MA	400mA
NTE74-5SCL500MA	500mA
NTE74-5SCL630MA	630mA
NTE74-5SCL800MA	800mA
NTE74-5SCL1A	1.0A
NTE74-5SCL1.25A	1.25A
NTE74-5SCL1.6A	1.6A
NTE74-5SCL2A	2.0A
NTE74-5SCL2.5A	2.5A
NTE74-5SCL3.15A	3.15A
NTE74-5SCL4A	4.0A
NTE74-5SCL5A	5.0A
NTE74-5SCL6.3A	6.3A
NTE74-5SCL8A	8.0A
NTE74-5SCL10A	10A
NTE74-5SCL12A	12A
NTE74-5SCL12.5A	12.5A
NTE74-5SCL15A	15A
NTE74-5FCL16A	16A

### Accessories:

74-FC5  
Fuse Clip



74-FB5  
Fuse Block

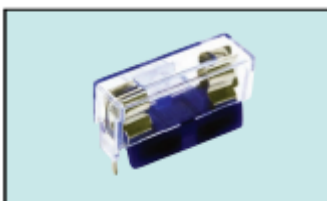

74-FH5  
Panel Fuse Holder



74-IFH5  
In-Line Holder

