




Ness Electronics, Inc.  
 1800 E 121<sup>st</sup> Street  
 Burnsville, MN 55337  
[www.nesselectronics.com](http://www.nesselectronics.com)  
 1-800-331-7617



## 5mm x 20mm Slow Blow Glass Fuses

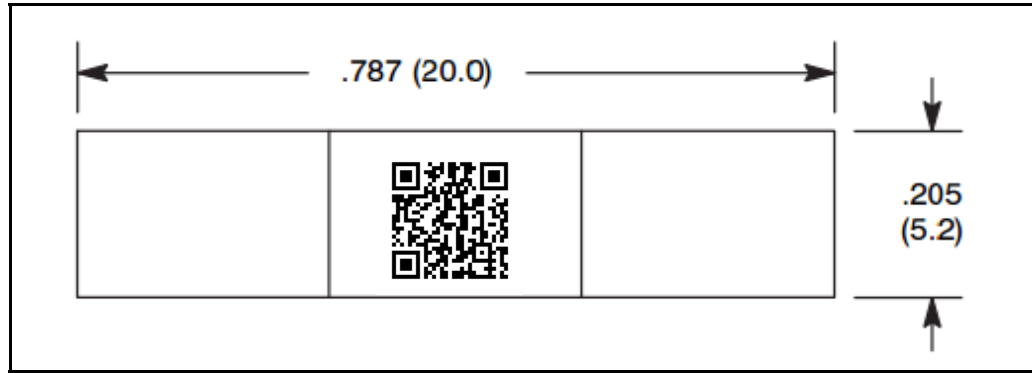

## Specifications

**Rated Voltage:** 125V / 250V

**Breaking Capacity:** 125VAC, 10KA; 250VAC, 20A

**Time Current Characteristics:**

% of Ampere Rating	Opening Time
110%	4 hours min.
135%	1 hour max.
200%	120 seconds max.

Part #	Current
NTE74-5SG200MA	200mA
NTE74-5SG250MA	250mA
NTE74-5SG300MA	300mA
NTE74-5SG400MA	400mA
NTE74-5SG500MA	500mA
NTE74-5SG600MA	600mA
NTE74-5SG750MA	750mA
NTE74-5SG800MA	800mA
NTE74-5SG1A	1.0A
NTE74-5SG1.25A	1.25A
NTE74-5SG1.6A	1.6A
NTE74-5SG2A	2.0A
NTE74-5SG2.5A	2.5A
NTE74-5SG3A	3.0A
NTE74-5SG3.15A	3.15A
NTE74-5SG4A	4.0A
NTE74-5SG5A	5.0A
NTE74-5SG7A	7.0A

## Accessories:

74-FC5  
Fuse Clip

74-FB5  
Fuse Block

74-FH5  
Panel Fuse Holder

74-IFH5  
In-Line Holder

